

**EXT
GREY**



Stykra EXT grey

Model No: **DS700**


Key Features

- High initial bond
- Specially designed for demanding outdoor applications
- Suitable for hard-to-bond materials such as powder coats and LSE plastics
- Operating temperatures of -30°C to +80°C
- Can be applied in temperatures as low as 1°C
- Impervious to temperature changes, weather, UV and chemical exposure
- Quick release filmic liner
- For optimum results, Stykra EXT tape primer is recommended. (Correct use can result in a 30% stronger bond, and instant handling time)

The Stykra EXT is the ultimate performance structural bonding tape. Designed to meet the most demanding applications, removing the need to use conventional fixings such as rivets, screws and glue. The Stykra EXT can be used for permanent fixing of materials with different expansive properties providing an exceptionally high strength bond.

Construction

- Red PE Liner
- Acrylic Adhesive

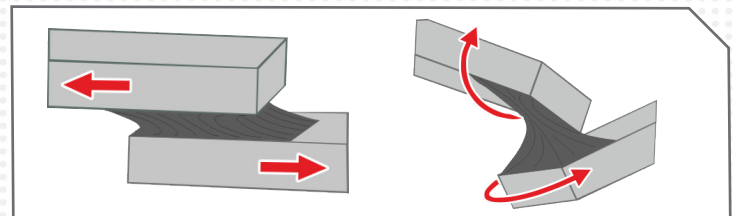

Item	Unit	Spec	Test Method
Total Thickness	mm	1.2 (±0.1)	-
Density	kg/m ³	780	-
180 ° Peel Strength	gf/25mm	3900	ASTM-D-3330
Tensile Strength	gf/cm ²	6000	ASTM-D-897
Dynamic Shear	gf/cm ²	5500	ASTM-D-1002
Temperature Resistance (short term)	°C	160	-
Temperature Resistance (long term)	°C	100	-
Low Temp. Resistance	°C	-40	-
UV Resistance	-	Good	-

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Sign Trade Supplies will not be responsible for the product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended purpose.